

# Models 5039/5539

## Ambria™

Swirl-way® Corner Whirlpool or Bathtub



### Bathtub and Whirlpool Features

- 59-1/2" x 59-1/2" x 21-1/4" corner bathtub
- Sculpted armrests and lumbar backrest
- Two pillows
- Spacious two-person bathing well
- Mansfield® Limited Ten Year Warranty
- Available in standard colors (white, almond, biscuit and bone) and premium colors (British khaki, sterling silver, black and ice gray)

### Basic Whirlpool Features

- Hydro-V back jet system
- Single speed pump
- 1-button electronic keypad
- Color match trim
- Dual air controls

### Luxury Whirlpool Features

- Hydro-V back jet system
- Variable speed pump
- 5-button electronic keypad with digital temperature readout
- Metal trim upgrades
- Chromotherapy system
- In-line heater



Model 5039LUX

### Options

#### Cable Drain

#### Lift and Turn Drain

Model #	Description		Model #	Description	
SW1319	Standard Colors		PF1320	Polished Chrome	
SW1320	Polished Chrome		PF1321	Everbrass (PVD)	
SW1321	Everbrass (PVD)		PF1322	Brushed Nickel	
SW1322	Brushed Nickel		PF1323	Oil Rubbed Bronze	
SW1323	Oil Rubbed Bronze			SW1328	Removable 3-sided Apron
SWA100	Rainbow Pillow				
SWP150	Factory Installed Nailing Flange		SWAP00	Nailing Flange Kit	

### Whirlpool Options

#### Metal Trim

Model #	Description		Model #	Description	
SW1335	Chrome		SWP151	In-line water heater	
SW1336	Everbrass (PVD)				
SW1337	Brushed Nickel				
SW1338	Oil Rubbed Bronze				



**MADE IN USA**

# Models 5039/5539

## Ambria™

Swirl-way® Corner Whirlpool or Bathtub






### Specifications

Model #	Description	Codes/Standards
5539	59-1/2" x 59-1/2" x 21-1/4" Corner bath.	  
5039BAS	Basic Whirlpool Package	
5039LUX	Luxury Whirlpool Package	

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	6
Construction	Self-contained, pre-plumbed whirlpool bath, mounted on a pre-leveled base	Water Capacity	60 gal. (min.) / 85 gal. (max.)
Pump Motor	Basic: 1.5 HP Single speed induction pump Luxury: 1.5 HP Variable speed induction pump	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m <sup>2</sup> )
Electrical Requirements	Basic: One 120V, 20 Amp, GFCI dedicated circuit. Optional heater: separate 120V, 20 Amp, GFCI dedicated circuit. Luxury: Two separate 120V, 20 Amp, GFCI dedicated circuits.	Shipping Weight	whirlpool - 155 lbs. bathtub - 135 lbs.
On/Off Control	Basic: 1-button electronic control pad Luxury: 5-button electronic control pad with digital readout showing temperature of water, speed of pump and time remaining in 20-minute cycle.	Warranty	Limited Ten Year

### Technical Information

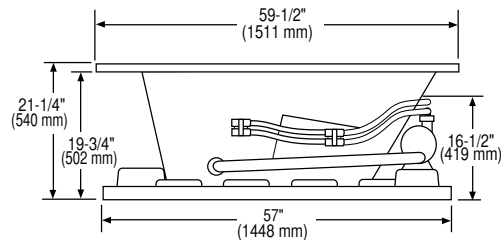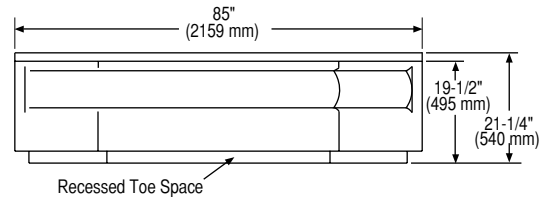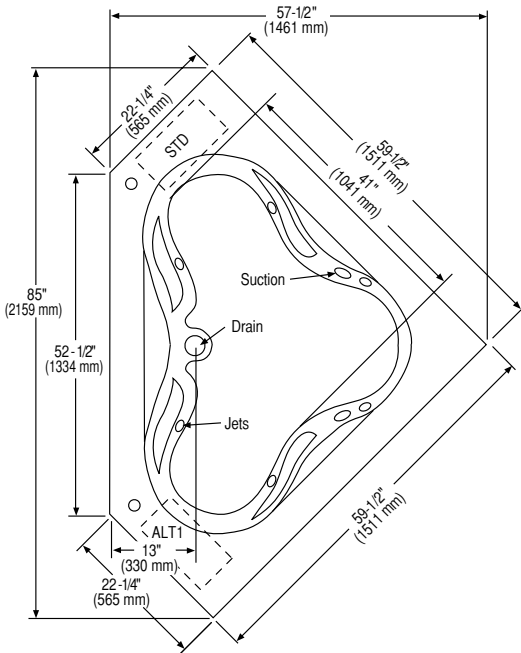

If a factory installed nailing flange is added to a unit, add 1/8" (3 mm) to each side flanged.

Pump locations are shown for clarity. STD-standard pump location. ALT1-alternate pump location.

Note: Install this product according to the installation guide. Rough-in measurements may vary 1/4" (+/-).

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.



**MADE IN USA**