



Model 6039  
Shown in White  
with EverBrass (PVD) Trim

**Features**

- 59-3/4" x 59-3/4" x 21-1/4" Corner whirlpool or bathtub
- Simple air-switch operation
- Single-speed pump
- Six powerful Ultra-Swirl jets
- Two air controls
- Optional removable corner apron
- Color-Match trim, metal upgrades available  
(Consult Price Book for specific colors)
- Available in Standard Colors  
(Consult Price Book for specific colors)
- Outstanding protection – Mansfield® Limited One Year Acrylic Warranty



Optional Removable Corner Apron

Model No.	Description	Approx. Wt.
6039	59-3/4" x 59-3/4" x 21-1/4" Corner whirlpool. Specify color and options when ordering.	127 lbs. (58 kg)
6539	59-3/4" x 59-3/4" x 21-1/4" Corner bath. Specify color and options when ordering.	107 lbs. (49 kg)
PF1327	Corner apron	20 lbs. (.9 kg)
SWP150	Factory installed nailing flange	2 lbs. (.9 kg)
SWAP00	Nailing flange kit	2 lbs. (.9 kg)
SWP151	Factory installed In-line heater	3 lbs. (1.3 kg)
PF1320	Chrome lift and turn drain kit	1 lbs. (.4 kg)
PF1321	Everbrass lift and turn drain kit	1 lbs. (.4 kg)
PF1322	Brushed nickel lift and turn drain kit	1 lbs. (.4 kg)
PF1323	Oil Rubbed Bronze lift and turn drain kit	1 lbs. (.4 kg)
PF1335	Chrome trim upgrade	1 lbs. (.4 kg)
PF1336	Everbrass trim upgrade	1 lbs. (.4 kg)
PF1337	Brushed nickel trim upgrade	1 lbs. (.4 kg)
PF1338	Oil Rubbed Bronze trim upgrade	1 lbs. (.4 kg)



### Upgrades

#### Factory Installed Nailing Flange

- Code approved nailing flange option makes watertight installation easy and secure.



#### Factory Installed In-line Heater

- A reliable, heating control upgrade maintains water temperature at desired level and operates when flow of water is detected in the system.



#### Nailing Flange Kit

- Code approved kit featuring flange material, sticky tape and instructions.
- Makes watertight installation easy and secure.



#### Lift & Turn Drain Kit Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze

- The lift and turn drain kit provides simple and easy draining of the bathtub.



#### Trim Upgrade



- This option allows an upgrade to Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze trim including jets, intake, control and air controls.

#### Removable Apron - Corner Model


- This upgrade provides quick and easy access through removable apron to whirlpool pump and interior parts. Available on selected models, check specific model upgrade listing.



### Technical Information

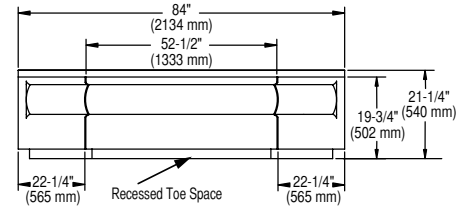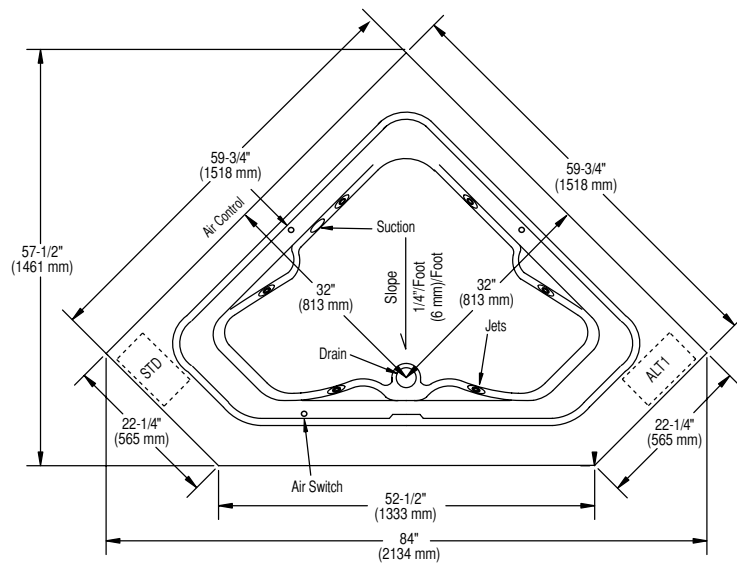

Optional Removable Apron

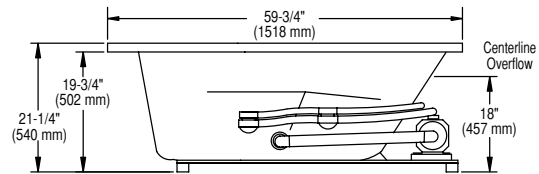

Pump locations are shown for clarity. STD-standard pump location. ALT1-alternate pump location.

Note: If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.

Installer Note: Due to the freeform shape of the tub shell, it is recommended that the tub be on the jobsite before making the final cut-out for drop-in installation.

Note: Measurements may vary 1/4" (+/-)

NOTE: Install this product according to the installation guide.

### Specifications

Dimensions	59-3/4" x 59-3/4" x 21-1/4"	Number of Jets	Six
Material	Acrylic, fiberglass reinforced	Air Volume Control	Two
Construction	Self-contained, pre-plumbed whirlpool bath, mounted on a pre-leveled base	Water Capacity	85 gal. max., 60 gal. min. (323 liters/228 liters)
Pump Motor	Single speed, 120 volt, 60 HZ, 5.5-5.9 amps, single phase premounted	Floor Loading	47 lbs./sq. ft. (229 kg/m <sup>2</sup> )
Electrical Requirements	120 volt, 20 AMP, GFCI	Shipping Weight (whirlpool)	167 lbs. (76 kg)
Inline Heater	1.5 KW, 12.5 AMP, 110 volt	Shipping Weight (bathtub)	137 lbs. (62 kg)
		Warranty	Limited One Year

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ANSI A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.