



PRO-FIT®

3660 TFS
 Rectangular Whirlpool or Bath




Model 6119
 Shown in White
 with EverBrass (PVD) trim

Features

- 60" x 35-3/4" x 23" Rectangular alcove whirlpool or bathtub
- Simple air-switch operation
- Single-speed pump
- Six powerful Ultra-Swirl jets
- Two air controls
- Integral apron and tile flange
- Optional removable long access panel on apron
- Color-Match trim, metal upgrades available
 (Consult Price Book for specific colors)
- Available in Standard Colors
 (Consult Price Book for specific colors)
- Outstanding protection – Mansfield® Limited One Year Acrylic Warranty

Model No.	Description	Approx. Wt.
6119	60" x 35-3/4" x 23" Lefthand rectangular whirlpool TFS	116 lbs. (53 kg)
6118	Righthand rectangular whirlpool TFS Specify color and options when ordering.	
6619	60" x 35-3/4" x 23" Lefthand rectangular bath TFS	96 lbs. (43 kg)
6618	Righthand rectangular bath TFS Specify color and options when ordering.	
PF1330	Access panel - 5 ft. model	3 lbs. (1.3 kg)
SWP151	Factory installed In-line heater	3 lbs. (1.3 kg)
PF1320	Chrome lift and turn drain kit	1 lbs. (.4 kg)
PF1321	Everbrass lift and turn drain kit	1 lbs. (.4 kg)
PF1322	Brushed nickel lift and turn drain kit	1 lbs. (.4 kg)
PF1323	Oil Rubbed Bronze lift and turn drain kit	1 lbs. (.4 kg)
PF1335	Chrome trim upgrade	1 lbs. (.4 kg)
PF1336	Everbrass trim upgrade	1 lbs. (.4 kg)
PF1337	Brushed nickel trim upgrade	1 lbs. (.4 kg)
PF1338	Oil Rubbed Bronze trim upgrade	1 lbs. (.4 kg)



3660 TFS

Rectangular Whirlpool or Bath

PRO-FIT®

Upgrades

Removable Access Panel - 5 ft. model

- This panel makes it a simple step to access the pump and other areas as required. Access panels available on TFS right and left hand models.



Lift & Turn Drain Kit

Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze

- The lift and turn drain kit provides simple and easy draining of the bathtub.



Factory Installed In-line Heater



- A reliable, heating control upgrade maintains water temperature at desired level and operates when flow of water is detected in the system. Features a standard plug for easy electrical connection (GFCI: 120V, 20 amp dedicated circuit required to power this heater).




Trim Upgrade

- This option allows an upgrade to Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze trim including jets, intake, control and air controls.

Technical Information

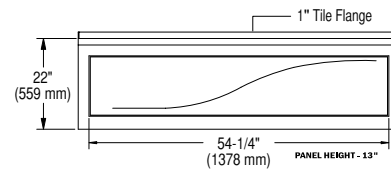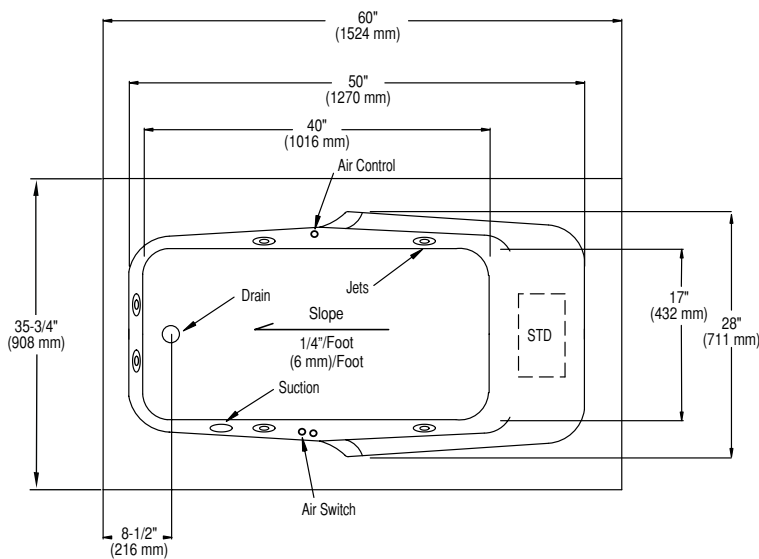

Optional Removable Apron

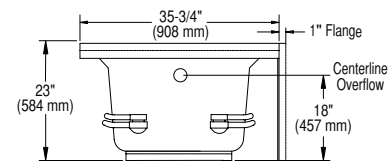

Pump locations are shown for clarity. STD-standard pump location.

Installer Note: Due to the freeform shape of the tub shell, it is recommended that the tub be on the jobsite before making the final cut-out for drop-in installation.

Note: Measurements may vary 1/4" (+/-)

Specifications

Dimensions	60" x 35-3/4" x 23"
Material	Acrylic, fiberglass reinforced
Construction	Self-contained, pre-plumbed whirlpool bath
Pump Motor	Single speed, 120 volt, 60 HZ, 5.5-5.9 amps, single phase premounted
Electrical Requirements	120 volt, 20 AMP, GFCI

Number of Jets	Six
Air Volume Control	Two
Water Capacity	45 gal. max., 32 gal. min. (171 liters/122 liters)
Floor Loading	47 lbs./sq. ft. (229 kg/m ²)
Shipping Weight	156 lbs. (71 kg)
Warranty	Limited One Year

NOTE: Install this product according to the installation guide.

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ANSI A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

Form No. M6118/M6119 Printed in U.S.A. 1/10
© 2010 Mansfield Plumbing Products, LLC

® Pro-fit is a registered trademark of Mansfield Plumbing Products, LLC.

Mansfield Plumbing Products LLC • Customer Service Toll Free 800-999-1459 • Fax 903-655-3503
Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com