



PRO-FIT®

3672 TFS

Rectangular Whirlpool or Bath



Model 6123
Shown in White
with EverBrass (PVD)


Features

- 71-1/4" x 35-1/2" x 23" Rectangular alcove whirlpool or bathtub
- Simple air-switch operation
- Single-speed pump
- Six powerful Ultra-Swirl jets
- Two air controls
- Integral apron and tile flange
- Optional removable oval access panel on apron
- Color-Match trim, metal upgrades available (Consult Price Book for specific colors)
- Available in Standard Colors (Consult Price Book for specific colors)
- Outstanding protection – Mansfield® Limited One Year Acrylic Warranty



Optional Removable Access Panel

Model No.	Description	Approx.Wt.
6123	71-1/4" x 35-1/2" x 23" Lefthand rectangular whirlpool TFS	130 lbs. (59 kg)
6122	Righthand rectangular whirlpool TFS Specify color and options when ordering.	
6623	71-1/4" x 35-1/2" x 23" Lefthand rectangular bath TFS	110 lbs. (50 kg)
6622	Righthand rectangular bath TFS Specify color and options when ordering.	
PF1340	Access panel	3 lbs. (.13 kg)
SWP151	Factory installed In-line heater	3 lbs. (.13 kg)
PF1320	Chrome lift and turn drain kit	1 lbs. (.4 kg)
PF1321	Everbrass lift and turn drain kit	1 lbs. (.4 kg)
PF1322	Brushed nickel lift and turn drain kit	1 lbs. (.4 kg)
PF1323	Oil Rubbed Bronze lift and turn drain kit	1 lbs. (.4 kg)
PF1335	Chrome trim upgrade	1 lbs. (.4 kg)
PF1336	Everbrass trim upgrade	1 lbs. (.4 kg)
PF1337	Brushed nickel trim upgrade	1 lbs. (.4 kg)
PF1338	Oil Rubbed Bronze trim upgrade	1 lbs. (.4 kg)



3672 TFS

Rectangular Whirlpool or Bath

PRO-FIT®

Upgrades

Access Panel - 6 ft. Model

- This upgrade provides quick and easy access through removable apron to whirlpool pump and interior parts.



Lift & Turn Drain Kit

Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze

- The lift and turn drain kit provides simple and easy draining of the bathtub.



Factory Installed In-line Heater


- A reliable, heating control upgrade maintains water temperature at desired level and operates when flow of water is detected in the system. Features a standard plug for easy electrical connection (GFCI: 120V, 20 amp dedicated circuit required to power this heater).



Trim Upgrade

- This option allows an upgrade to Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze trim including jets, intake, control and air controls..

Technical Information

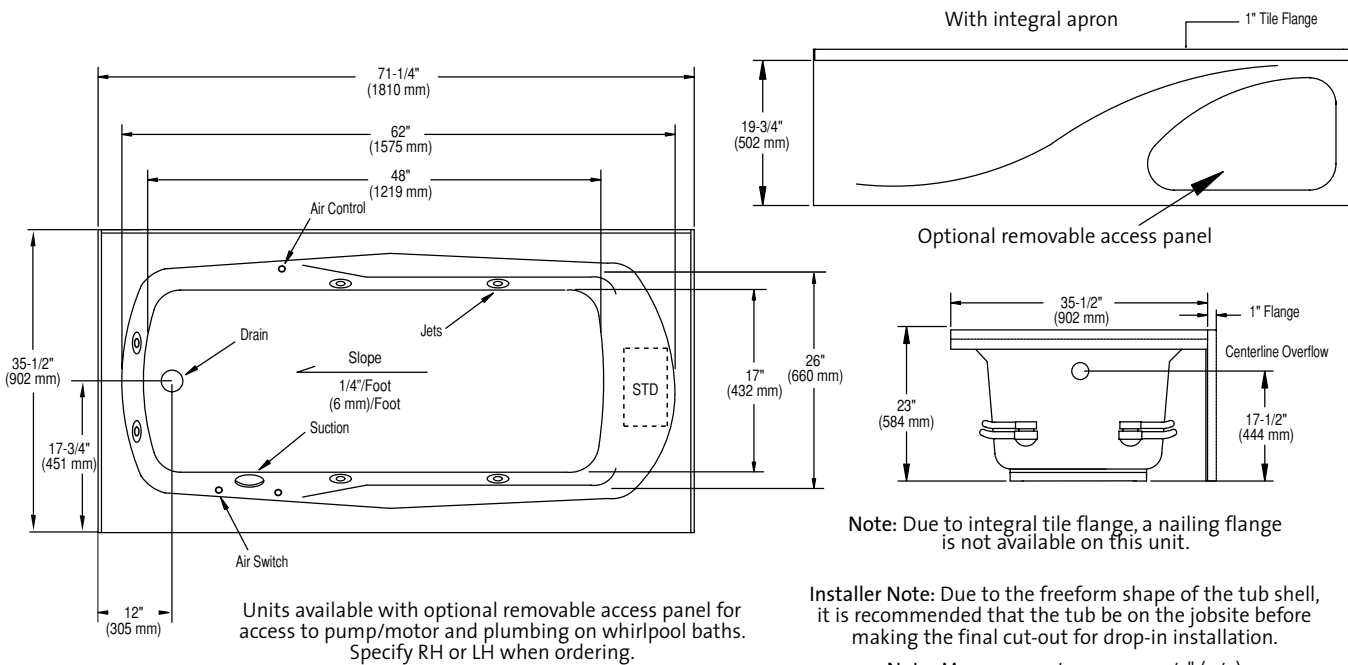

Specifications

Dimensions	71-1/4" x 35-1/2" x 23"	Number of Jets	Six
Material	Acrylic, fiberglass reinforced	Air Volume Control	Two
Construction	Self-contained, pre-plumbed whirlpool bath	Water Capacity	52 gal. max., 38 gal. min. (198 liters/144 liters)
Pump Motor	Single speed, 120 volt, 60 HZ, 5.5-5.9 amps, single phase pre-mounted	Floor Loading	47 lbs./sq. ft. (229 kg/m ²)
Electrical Requirements	120 volt, 20 AMP, GFCI	Shipping Weight (whirlpool)	170 lbs. (77 kg)
		Shipping Weight (bathtub)	150 lbs. (68 kg)
		Warranty	Limited One Year

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ANSI A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

