



PRO-FIT®

4272

Rectangular Whirlpool or Bath



Model 6027
Shown in White
with EverBrass (PVD) trim

Features

- 71-1/2" x 42" x 19-3/4" Rectangular whirlpool or bathtub
- Simple air-switch operation
- Single-speed pump
- Six powerful Ultra-Swirl jets
- Two air controls
- Optional removable apron
- Color-Match trim, metal upgrades available
(Consult Price Book for specific colors)
- Available in Standard Colors
(Consult Price Book for specific colors)
- Outstanding protection – Mansfield® Limited One Year Acrylic Warranty

Model No.	Description	Approx.Wt.
6027	71-1/2" x 42" x 19-3/4" Rectangular whirlpool. Specify color and options when ordering.	122 lbs. (55 kg)
6527	71-1/2" x 42" x 19-3/4" Rectangular bath. Specify color and options when ordering.	102 lbs. (46 kg)
PF1326	Six foot apron	15 lbs. (6.7 kg)
SWP150	Factory installed nailing flange	2 lbs. (.9 kg)
SWAPoo	Nailing flange kit	2 lbs. (.9 kg)
SWP151	Factory installed In-line heater	3 lbs. (1.3 kg)
PF1320	Chrome lift and turn drain kit	1 lbs. (.4 kg)
PF1321	Everbrass lift and turn drain kit	1 lbs. (.4 kg)
PF1322	Brushed nickel lift and turn drain kit	1 lbs. (.4 kg)
PF1323	Oil Rubbed Bronze lift and turn drain kit	1 lbs. (.4 kg)
PF1335	Chrome trim upgrade	1 lbs. (.4 kg)
PF1336	Everbrass trim upgrade	1 lbs. (.4 kg)
PF1337	Brushed nickel trim upgrade	1 lbs. (.4 kg)
PF1338	Oil Rubbed Bronze trim upgrade	1 lbs. (.4 kg)



Upgrades

Removable Apron - 6 ft. Model

- This upgrade provides quick and easy access through removable apron to whirlpool pump and interior parts. Available on selected models, check specific model upgrade listing.



Factory Installed In-line Heater

- A reliable, heating control upgrade maintains water temperature at desired level and operates when flow of water is detected in the system. Features a standard plug for easy electrical connection (GFCI: 120V, 20 amp dedicated circuit required to power this heater).



Factory Installed Nailing Flange

- Code approved, nailing flange option makes watertight installation easy and secure.



Lift & Turn Drain Kit

Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze

- The lift and turn drain kit provides simple and easy draining of the bathtub.



Nailing Flange Kit


- Code approved kit featuring flange material, sticky tape and instructions.
- Makes watertight installation easy and secure.



Trim Upgrade


- This option allows an upgrade to Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze trim including jets, intake, control and air controls.

Technical Information


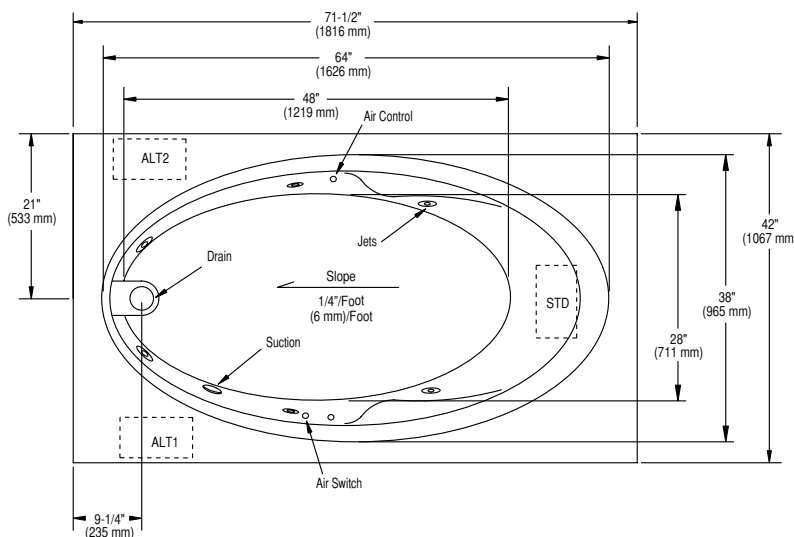


Pump locations are shown for clarity. STD-standard pump location. ALT1 and ALT2-alternate pump locations are optional.

Note: Measurements may vary 1/4" (+/-)

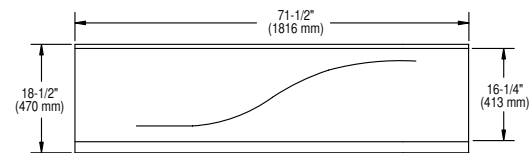

Optional Removable Apron

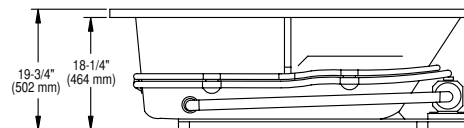

Note: If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.

Installer Note: Due to the freeform shape of the tub shell, it is recommended that the tub be on the jobsite before making the final cut-out for drop-in installation.

NOTE: Install this product according to the installation guide.

Specifications

Dimensions	71-1/2" x 42" x 19-3/4"	Number of Jets	Six
Material	Acrylic, fiberglass reinforced	Air Volume Control	Two
Construction	Self-contained, pre-plumbed whirlpool bath	Water Capacity	80 gal. max., 55 gal. min. (304 liters/209 liters)
Pump Motor	Single speed, 120 volt, 60 HZ, 5.5-5.9 amps, single phase premounted	Floor Loading	47 lbs./sq. ft. (229 kg/m ²)
Electrical Requirements	120 volt, 20 AMP, GFCI	Shipping Weight (whirlpool)	130 lbs. (59 kg)
		Shipping Weight (bathtub)	110 lbs. (50 kg)
		Warranty	Limited One Year

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ANSI A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.