



PRO-FIT®

4268 OV ED
Oval Whirlpool or Bath




Model 6028E
Shown in White
with EverBrass (PVD) trim

Features

- 68" x 42" x 20" Oval whirlpool or bathtub
- Simple air-switch operation
- Single-speed pump
- Six powerful Ultra-Swirl jets
- Two air controls
- Drop-in installation
- Color-Match trim, metal upgrades available
(Consult Price Book for specific colors)
- Available in Standard Colors
(Consult Price Book for specific colors)
- Outstanding protection – Mansfield® Limited One Year Acrylic Warranty

Model No.	Description	Approx. Wt.
<u>6028E</u>	68" x 42" x 20" Oval end drain whirlpool. Specify color and options when ordering.	118 lbs. (54 kg)
<u>6528E</u>	68" x 42" x 20" Oval end drain bath. Specify color and options when ordering.	98 lbs. (44 kg)
<u>SWP151</u>	Factory installed In-line heater	3 lbs. (1.3 kg)
<u>PF1320</u>	Chrome lift and turn drain kit	1 lbs. (.4 kg)
<u>PF1321</u>	Everbrass lift and turn drain kit	1 lbs. (.4 kg)
<u>PF1322</u>	Brushed nickel lift and turn drain kit	1 lbs. (.4 kg)
<u>PF1323</u>	Oil Rubbed Bronze lift and turn drain kit	1 lbs. (.4 kg)
<u>PF1335</u>	Chrome trim upgrade	1 lbs. (.4 kg)
<u>PF1336</u>	Everbrass trim upgrade	1 lbs. (.4 kg)
<u>PF1337</u>	Brushed nickel trim upgrade	1 lbs. (.4 kg)
<u>PF1338</u>	Oil Rubbed Bronze trim upgrade	1 lbs. (.4 kg)



4268 OV ED

Oval Whirlpool or Bath

PRO-FIT®

Upgrades

Factory Installed In-line Heater

- A reliable, heating control upgrade maintains water temperature at desired level and operates when flow of water is detected in the system. Features a standard plug for easy electrical connection (GFCI: 120V, 20 amp dedicated circuit required to power this heater).



Trim Upgrade

- This option allows an upgrade to Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze trim including jets, intake, control and air controls.


Lift & Turn Drain Kit

Chrome, Everbrass (PVD), Brushed Nickel and Oil Rubbed Bronze

- The lift and turn drain kit provides simple and easy draining of the bathtub.



Technical Information

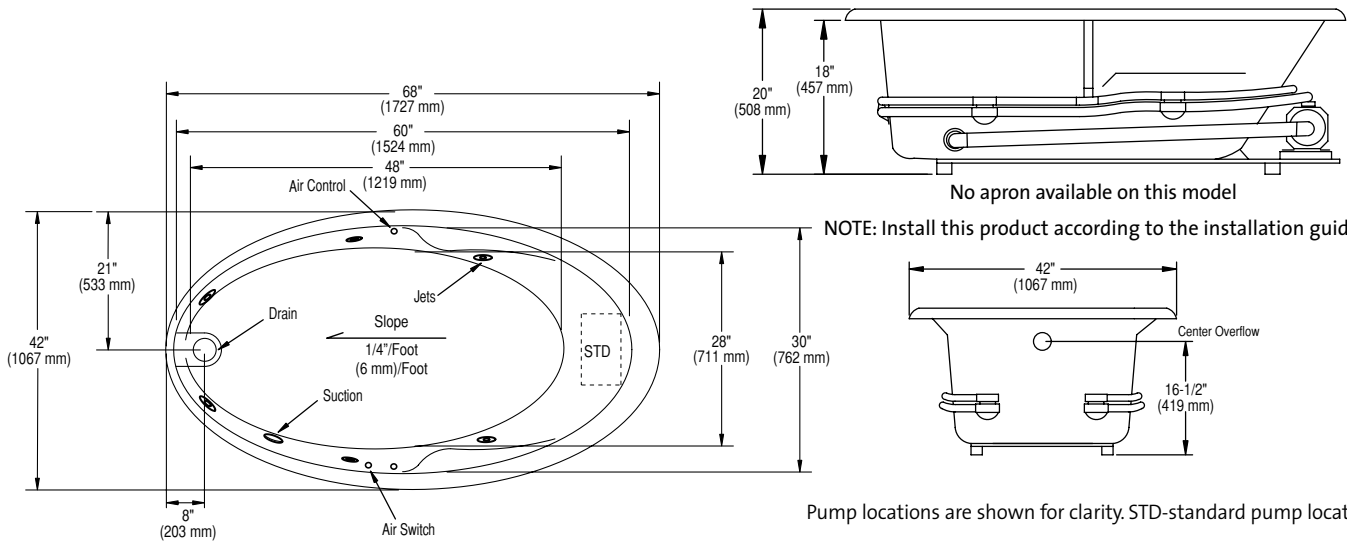

Specifications

Dimensions	68" x 42" x 20"	Number of Jets	Six
Material	Acrylic, fiberglass reinforced	Air Volume Control	Two
Construction	Self-contained, pre-plumbed whirlpool bath	Water Capacity	74 gal. max., 59 gal. min. (281 liters/224 liters)
Pump Motor	Single speed, 120 volt, 60 HZ, 5.5-5.9 amps, single phase premounted	Floor Loading	47 lbs./sq. ft. (229 kg/m ²)
Electrical Requirements	120 volt, 20 AMP, GFCI	Shipping Weight (whirlpool)	158 lbs. (72 kg)
		Shipping Weight (bathtub)	138 lbs. (63 kg)
		Warranty	Limited One Year

Note: Measurements may vary 1/4" (+/-)

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ANSI A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

Form No. M6028E Printed in U.S.A. 1/10
© 2010 Mansfield Plumbing Products, LLC

© Pro-fit is a registered trademark of Mansfield Plumbing Products, LLC.

Mansfield Plumbing Products LLC • Customer Service Toll Free 800-999-1459 • Fax 903-655-3503
Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com

